Tech Info Library

Macintosh AV: S-Video Connector Pinouts (2/95)

Article	Created:	14	February	1995
TOPIC -				

I am trying to purchase an S-Video cable to attach a VCR to my Quadra 840AV. I noticed that the S-Video input connector on the back of my VCR has four pins and the S-Video input connector on the back of my Quadra 840AV has seven pins.

Do I need a special cable with seven pins to hook up my VCR to my Quadra 840AV?


DISCUSSION -----

The standard 4-pin S-Video connector used on most video and television equipment is functionally identical and fully compatible with the 7-pin S-Video input connector used on the Quadra 660AV, 840AV and Power Macintosh 6100, 7100, 8100 AV card.

The only difference between the two connectors is that Apple provides three additional inputs, I^2C clock, I^2C data, +12V, that were intended for future products and expansion.

A standard 4-pin S-Video cable available at most electronics stores will fit into the Apple 7-pin S-Video input connector without a problem. No adapter cable is necessary because pins 5, 6, and 7 are unused.

Below is a chart showing the pinouts of both the 4-pin and 7-pin connectors:

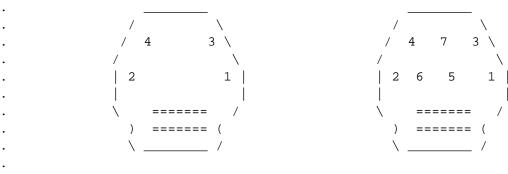

4-pin S-Video Connector Apple 7-Pin S-Video Input Connector

.

PIN # DESCRIPTION PIN # DESCRIPTION

•				
	1	AGND (signal)	1	AGND (signal)
	2	AGND (power)	2	AGND (power)
	3	Video Y	3	Video Y
	4	Video C	4	Video C
			5	I^2C clock
			6	+12 V
			7	I^2C data

Support Information Services Copyright 1995, Apple Computer, Inc.

Keywords: <None>

This information is from the Apple Technical Information Library.

19960215 11:05:19.00

Tech Info Library Article Number: 17174