



# Tech Info Library

## Power Macintosh 8100/110: 2 GB Hard Drive Jumper Settings (2/96)

Article Created: 28 February 1996

\* RESTRICTED: Apple Internal and Support Providers Only \*  
Not For General Public Release


TOPIC -----

What are the jumper settings for the internal 2 GB drive at SCSI ID 0 on the Power Macintosh 8100/110?

DISCUSSION -----

Below are the correct jumper settings for the 2 GB drive that originally shipped in the Power Macintosh 8100/110. The following illustration assumes that you are looking at the jumper assembly located on the front of the hard drive (opposite the 50-pin SCSI connector) and that the PC board is oriented on top. Use pins 1 & 2, and 9 (Blank) for reference.

Begin\_Graphic

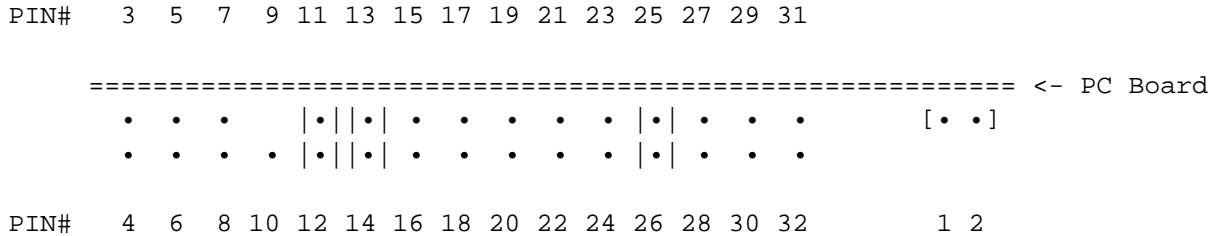

PIN #'S	DESCRIPTION
PINS 1 & 2	Termination Power Enable (Default)
PINS 3 & 4	ID2 (Leave blank for SCSI ID-0)
PINS 5 & 6	ID1 (Leave blank for SCSI ID-0)
PINS 7 & 8	ID0 (Leave blank for SCSI ID-0)
PINS 9 & 10	BLANK/UNUSED
PINS 11 & 12	Auto Start (DEFAULT)
PINS 13 & 14	Enable Active Termination (DEFAULT)
PINS 15 & 16	Master Sync
PINS 17 & 18	External Activity LED

PINS 19 & 20 Write Protect  
PINS 21 & 22 Auto Start Delay  
PINS 23 & 24 Option Block Mode  
PINS 25 & 26 Disable TI Sync Negotiations (Default)  
PINS 27 & 28 Disable SCSI Parity  
PINS 29 & 30 Disable Unit Attention  
PINS 31 & 32 Customizing

End\_Graphic

Copyright 1996, Apple Computer, Inc.

Keywords: kppc,hts

=====

This information is from the Apple Technical Information Library.

19960229 07:15:49.00

Tech Info Library Article Number: 19415